

## Simply Better Tree Support

EZ Tree Wrap™ was developed & patented by Pierson Supply to make trellis support faster, easier, and gentler on your trees. With a low cost per tree and easy installation, it's become the go-to solution for nurseries and tree farms across the country.



**Tool-free installation and removal**  
no clips, ties, or clamps

**No tree dimpling or marking**  
gentle support that protects your investment


**Tight, consistent hold**  
no unwanted shifting on the trellis line

**Quick storm laydowns**  
remove either side in seconds and reinstall just as fast

**Reusable, long-lasting components**  
designed for repeated adjustments and seasons of use

### The EZ Tree Wrap™ Components

A: Slit Tubing | B: Unslit Tubing | C: Helix Wire

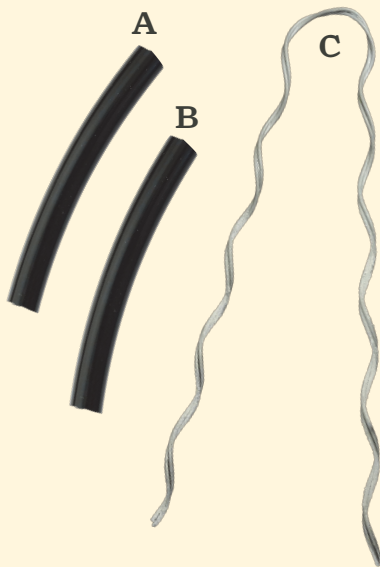

#### up to 2 in. Caliper

Component	Size	Quantity
Helix Wire	24 in.	100
Tubing	6 - 8 in.	200 ft.

#### 2+ in. Caliper

Component	Size	Quantity
Helix Wire	30 in.	100
Tubing	6 - 8 in.	200 ft.

EZ Tree Wrap™ works best with trellis lines ¼ inch, 1 x 7 galvanized guy strand



1 Cut tubing (A&B) to desired lengths



2 Slot the slit tubing (A) onto trellis line at desired installation point. Be sure slit faces away from tree. Center tree on slit tubing.



3 Insert the helix wire (C) into unslit tubing (B) until centered. Some straightening of helix wire is necessary to accommodate tree diameter.



4 Wrap left side of the helix wire (C) around trellis line in a counter-clockwise motion.



5 Center tree and wrap right side of helix wire (C) around trellis line in a counter-clockwise motion.



**FOR TAKEDOWN:** Simply unwrap either side of the helix wire and remove tree.