Simply Better Tree Support

EZ Tree Wrap™ was developed & patented by Pierson Supply to make trellis support faster, easier, and gentler on your trees. With a low cost per tree and easy installation, it's become the go-to solution for nurseries and tree farms across the country.



Tool-free installation and removal
no clips, ties, or clamps

No tree dimpling or marking
gentle support that protects your investment


Tight, consistent hold
no unwanted shifting on the trellis line

Quick storm laydowns
remove either side in seconds and reinstall just as fast

Reusable, long-lasting components
designed for repeated adjustments and seasons of use

The EZ Tree Wrap™ Components

A: Slit Tubing | **B**: Unslit Tubing | **C**: Helix Wire

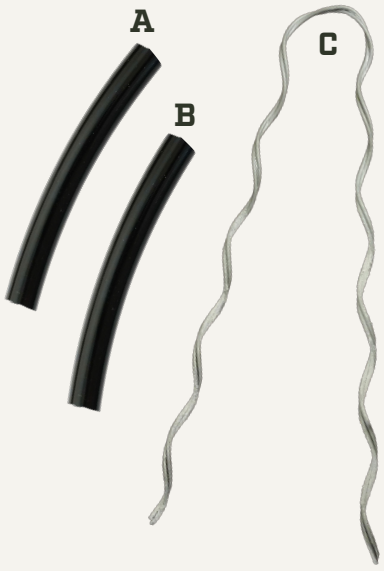

up to 2 in. Caliper		
Component	**Size**	**Quantity**
Helix Wire	24 in.	100
Tubing	6 - 8 in.	200 ft.

2+ in. Caliper		
Component	**Size**	**Quantity**
Helix Wire	30 in.	100
Tubing	6 - 8 in.	200 ft.

EZ Tree Wrap™ works best with trellis lines ¼ inch, 1 x 7 galvanized guy strand

ez tree wrap

Installation Guide



Cut tubing (A&B) to desired lengths



Slot the slit tubing (A) onto trellis line at desired installation point. Be sure slit faces away from tree. Center tree on slit tubing.



Insert the helix wire (C) into unslit tubing (B) until centered. Some straightening of helix wire is necessary to accommodate tree diameter.



Wrap left side of the helix wire (C) around trellis line in a counter-clockwise motion.



Center tree and wrap right side of helix wire (C) around trellis line in a counter-clockwise motion.



FOR TAKEDOWN: Simply unwrap either side of the helix wire and remove tree.